




主要特征

- 最大温度范围 : - 40 ... + 90°C
- 允差: UNI 7937, IEC 751 标准 :
 - ± 0.15° C a 0° C 对于A等级 (1/2 DIN)
 - ± 0.30° C a 0° C 对于B等级 (1 DIN)
 - ± 0.10° C a 0° C 1/3 DIN 等级
- 陶瓷绝缘的灵敏元件, 0°C时 Pt100
- 强化玻璃纤维聚酯盒, 尺寸 : 56x75x110mm

产品型号

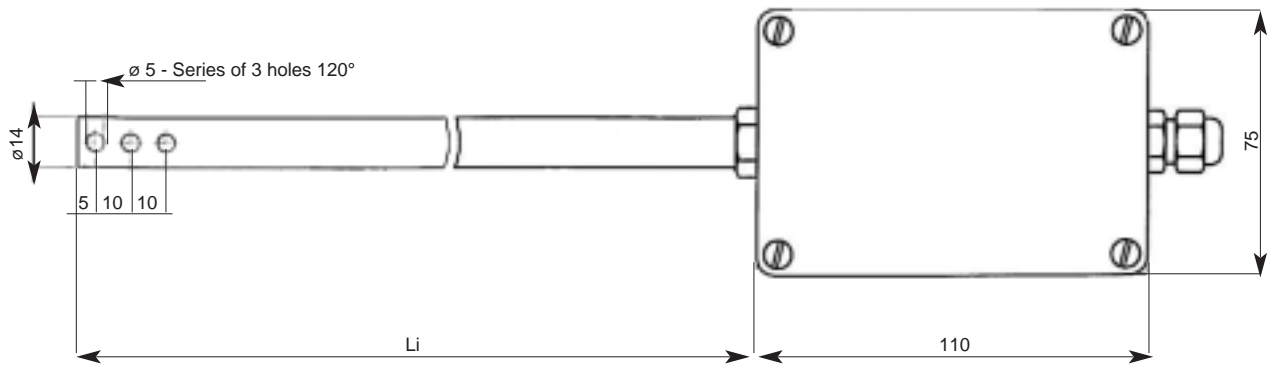

订货代码

